


Specification

Dimensions (W x D x H)	21.14 x 35.61 x 1.76 (inch) 537 x 904.5 x 44.8 (mm)
Output Power	72kW (49V <sub>dc</sub> / 1470A)
Input Voltage	3Φ 380-480V <sub>AC</sub>
Input Frequency	50/60 Hz
Communications	MODBUS
EMC Standards	Class A
Safety Standards	IEC60950 / IEC62368
Temperature	Operating: -5°C to +45°C, Storage: -40°C to +70°C
Humidity	10-85% RH non-condensing
Altitude	3050m
Cooling	By PSU fan air flow

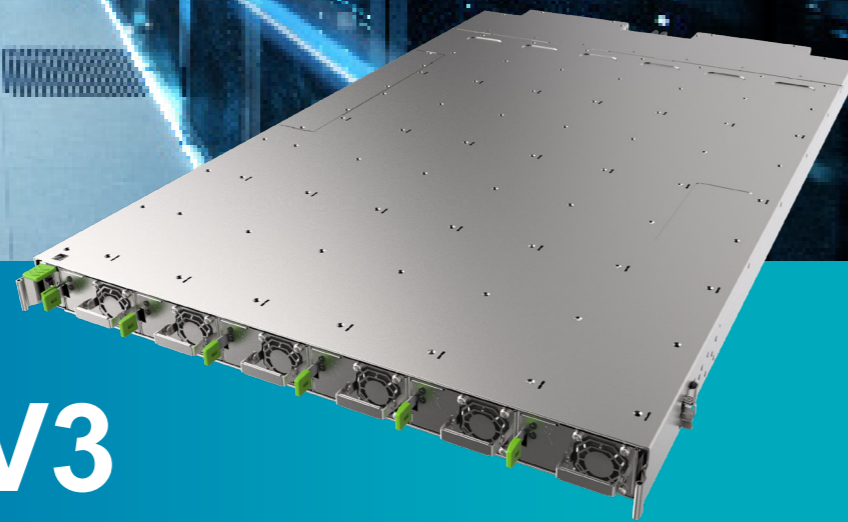

# 72kW ORV3 Power Shelf 48V

## Key Features

**Power Rating**  
3Φ 380-480Vac providing 12kW PSU in 6 parallel to output 72kW (49V / 1470A<sub>max</sub>)

**Dimension**  
10U, 21-inch width power shelf

**Shelf Management**  
PMM for remote control & power monitoring

**Communication**  
Daisy-Chain function for multiple power shelves parallel operation

## Applications



HPC



AI




Deep Learning



Data Analytics

## Dimension Details

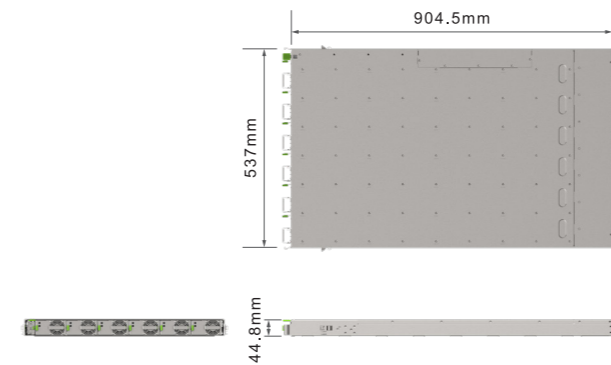

For more product information and sales inquiries :

- [www.liteon.com](http://www.liteon.com)
- +886-2-8798-2888
- [CIPS-Sales@liteon.com](mailto:CIPS-Sales@liteon.com)
- 13F, No. 555, Siyuan Rd., Xinzhuang Dist.,  
New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.